

adapt[®] 600 easiSpec


Seating Assessment / Specification Form

User Weight





User Height

Min: 1560mm
Max: 2210mm

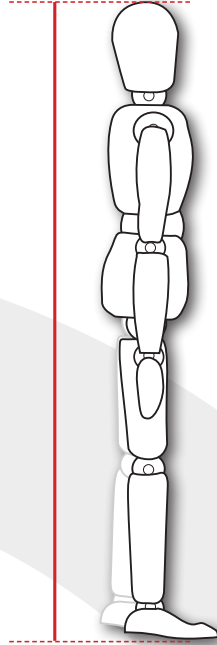

Chair Action

Asynchronous
Knee-Tilt

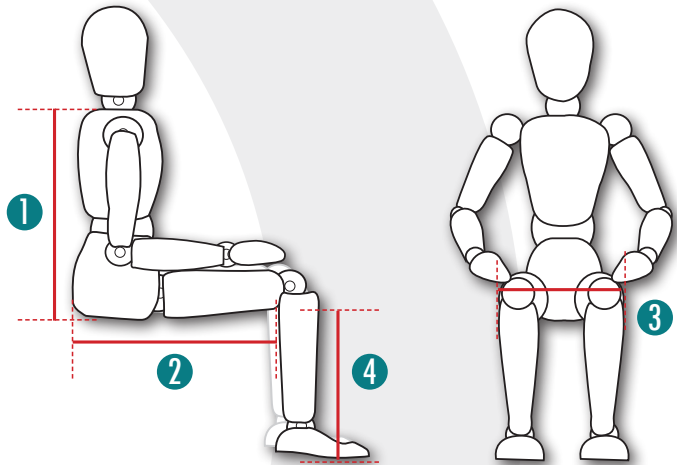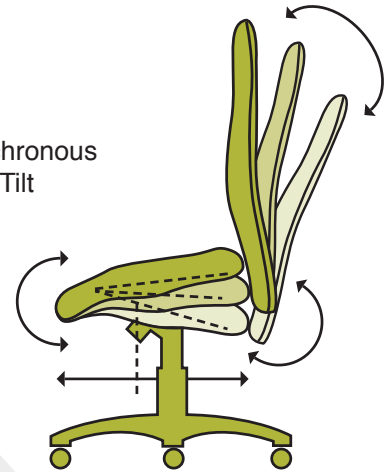

	Min	Max
① Seat to Shoulder (Back Height)	350mm	670mm
② Back of Buttock to Back of Knee (Seat Depth)	340mm	660mm
③ Hip Width at widest point (Seat width)	410mm	610mm
④ Floor to Underside of Knee (Seat Height)	430mm	630mm*

*Higher gas columns available for use in specific environments

Client Company


Assessor Date

Seating Assessment / Specification Form 2

BACK REST



Please tick box option and state the required dimensions if different from those shown

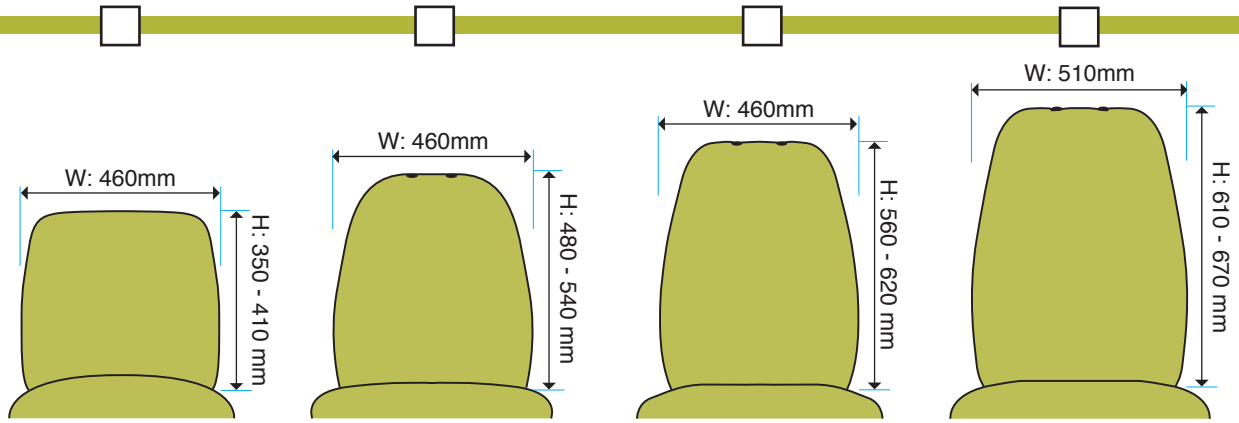

CHAIR CODE

Width Reduction

Height Reduction

610/640

REDBW: to mm

REDBH: to mm

620/650

REDBW: to mm

REDBH: to mm

630/660

REDBW: to mm

REDBH: to mm

680

REDBW: to mm


REDBH: to mm

- If using a neck support, subtract 80mm from the Nape of Neck measurement in order to calculate correct back height
- Back Heights may be increased by 75mm using the EXTD Extended Back Bar option - please contact us for details

SEAT



Please tick box option and state the required dimensions if different from those shown

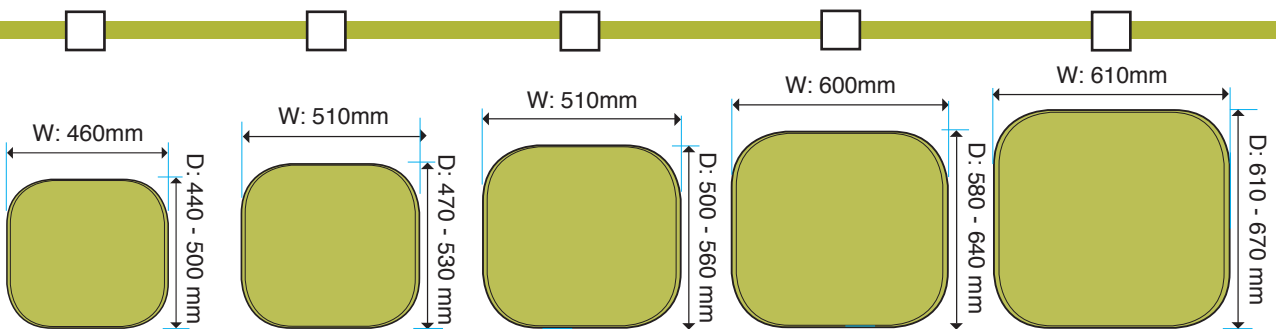

CHAIR CODE

Width Reduction

Depth Reduction

610/620/630

REDW: to.....mm

REDD: to.....mm

640/650/660

REDW: to.....mm

REDD: to.....mm

XL

REDW: to.....mm

REDD: to.....mm

680

REDW: to mm

REDD: to mm

XXL (Max)

REDW: to mm


REDD: to mm

- Use Back of Buttock to Back of Knee measurement and SUBTRACT 30mm to calculate optimum seat depth
- Use Hip to Hip measurement and ADD 50mm to calculate the optimum seat width
- **MINIMUM SEAT WIDTH IS 410mm AND MINIMUM SEAT DEPTH IS 340mm (with seat slide)**

SEAT HEIGHT



Please tick required option approx heights

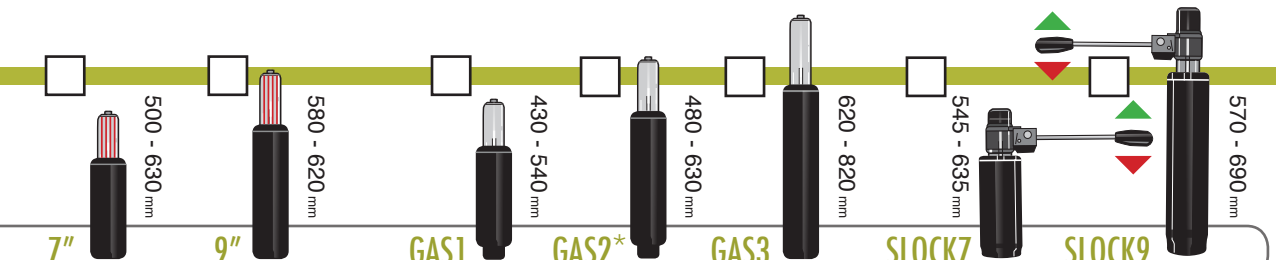

GAS CODE

NON SWIVEL GAS COLUMN


STANDARD GAS COLUMN

SWIVEL LOCK

BASE




Please tick required option

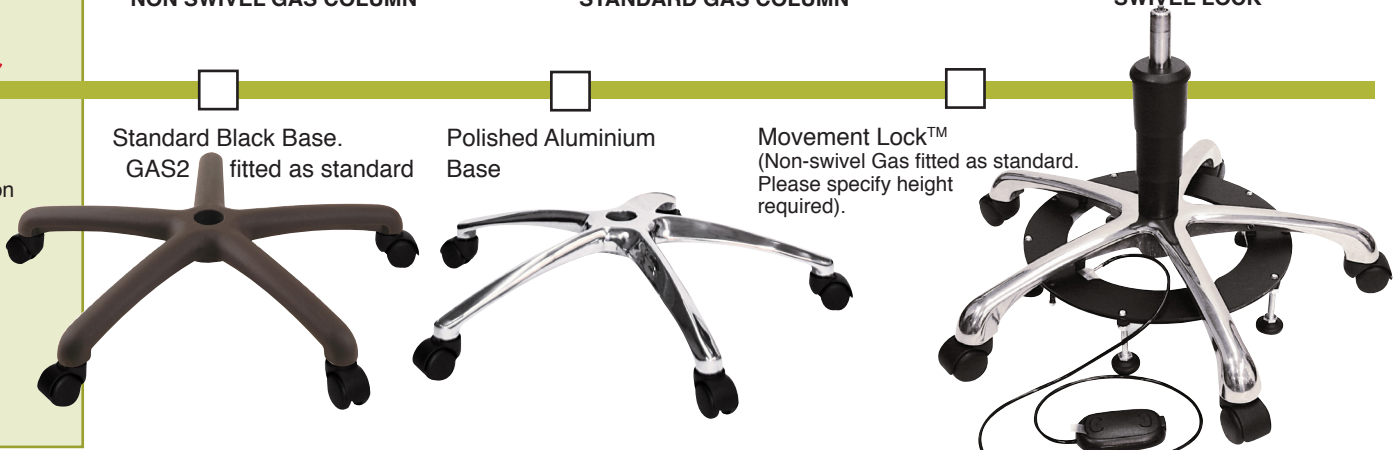

ARM OPTIONS

Level One Adaptations

Please tick required option

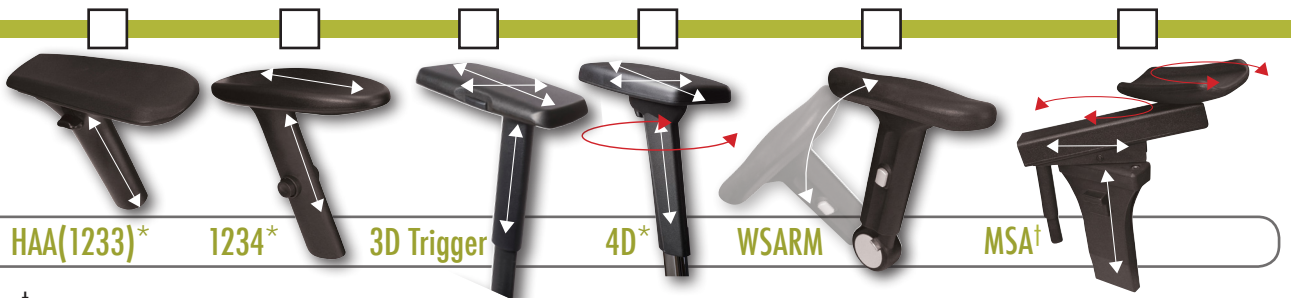

ARM CODE HAA(1233)* 1234* 3D Trigger 4D* WSARM MSA†

ARM PAD ENHANCEMENTS

Please tick required option



PAD CODE UPARM GEL PADS

*ADARM +50mm *ADARM -50mm

ADARM will add or subtract 50mm from arm height (measured from seat surface to top of arm pad). Applies only to arm options marked with asterisk.




†MSA Arm is designed to support arm weight only. **Do not use to assist when moving from sitting to standing**

Compatible with HAA & 1234

• Standard seat surface to underside of arm Arm Height is 150 - 240mm. If not suitable use **ADARM** option

HEAD SUPPORT

Please tick required option

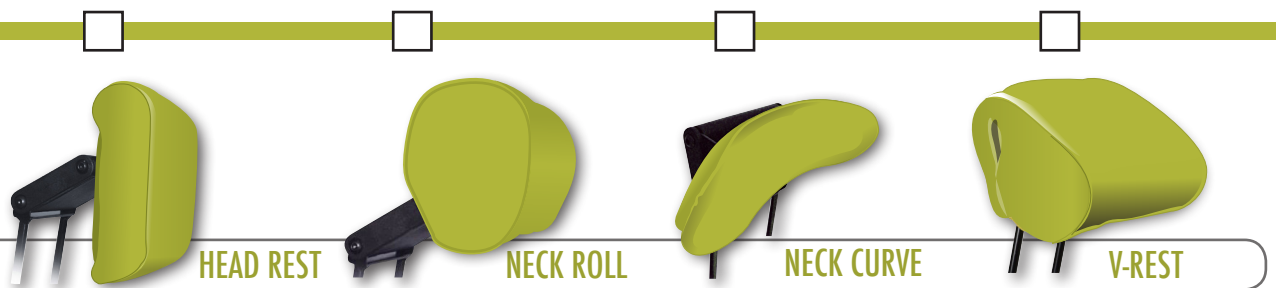


HEAD CODE HEAD REST NECK ROLL NECK CURVE V-REST

SEAT ENHANCEMENT


Level Two Adaptations

Please tick required option

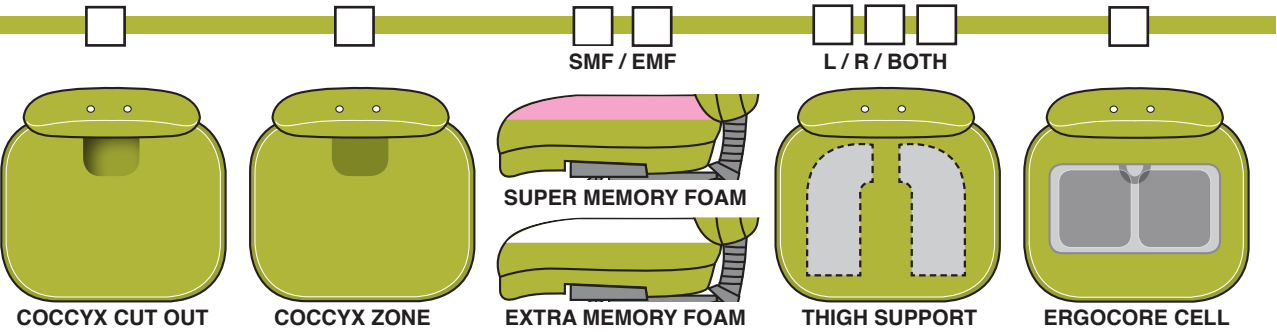

ENHANCE CODE /CC /CZ SMFS or /MFS /TS /ECORE

Please tick required option

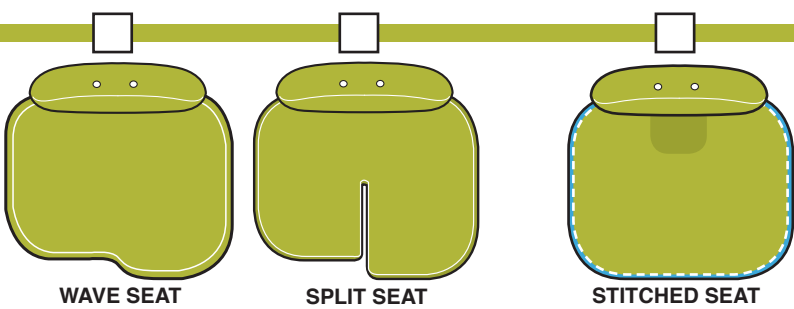

ENHANCE CODE WAVE SPLIT SEWN SEAT

A sewn seat will provide an even thickness of foam and a uniform tension of fabric across the surface of the seat resulting in a superior sit. This is particularly beneficial when specifying extra layers of memory foam in order to achieve a softer sit.

Please specify required **WAVE SEAT DEPTH** ie. Back Buttock to Back of Knee L&R -30mm
 R (when sitting)mm L (when sitting)mm


**(OPTIONAL)
BACK
ENHANCEMENTS**

Level two Adaptations (continued)

Unless stated otherwise, lumbar cell position will be centered at approx 180mm above seat surface as standard

Please tick box option and state the required dimensions if different from those shown

CODE **LUMBAR CELL** **SACRAL CELL**

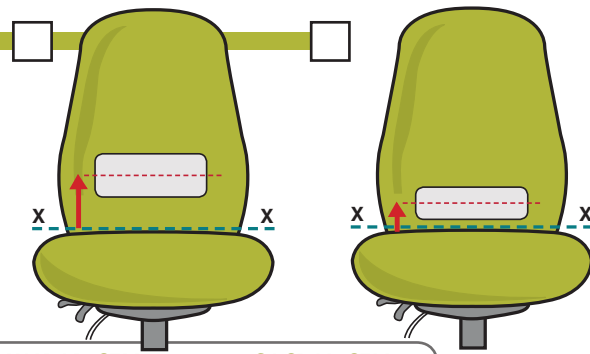

Measure distance from seat surface to centre of Air Cell and enter as X+



LUMBAR CELL

LOCATE CENTRE OF AIR CELL AT
X+mm


Measure distance from seat surface to centre of Air Cell and enter as X+




SACRAL CELL

LOCATE CENTRE OF AIR CELL AT
X+mm

CODE **/3LUM**

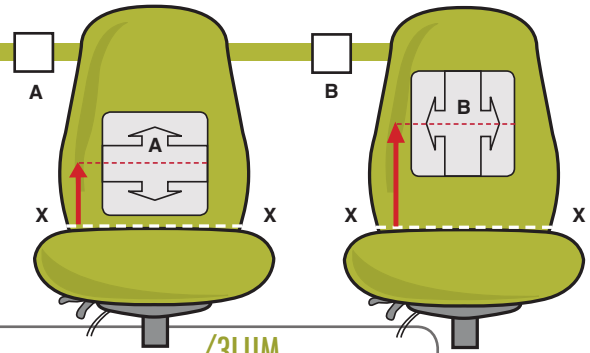


Measure distance from seat surface to centre of Air Cell and enter as X+

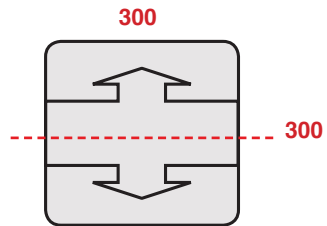

/3LUM REACTIVE LUMBAR CELL


LOCATE CENTRE OF AIR CELL AT
X+mm

CODE **/VSR** **/VSL**

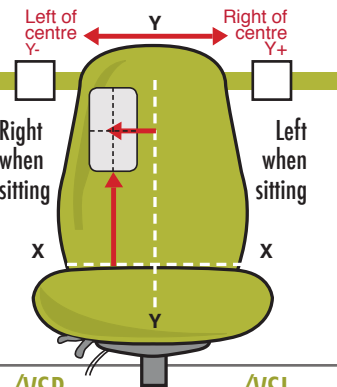

Measure distance from seat surface to centre of Air Cell and enter as X+


Measure distance from centre of back rest to centre of Air Cell and enter as Y+/-



/VSL /VSR VERTICAL CELL


LOCATE CENTRE OF AIR CELL AT
X+mm
Y+mm
Y-mm

CODE **/THOR**

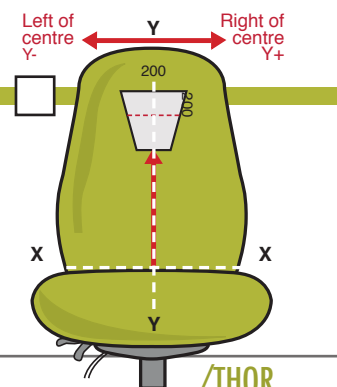

Measure distance from seat surface to centre of Air Cell and enter as X+


If not using centrally, measure distance from centre of back rest to centre of Air Cell and enter as Y+/-



THORACIC CELL

LOCATE CENTRE OF AIR CELL AT
X+mm
And (if not central)
Y+mm
Y-mm

CODE **MFB+SMFB** **SCULP** **SEWN BACK**

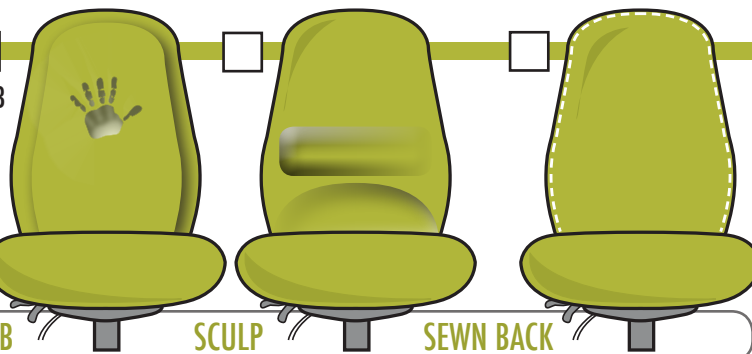

SOFT WHEEL CASTORS

CODE **SWC**

BRAKE UNLOADED CASTORS

CODE **BUC**

BRAKE LOADED CASTORS

CODE **BLC**